


## ELECTRONIC BALLASTS

### EBT5-235

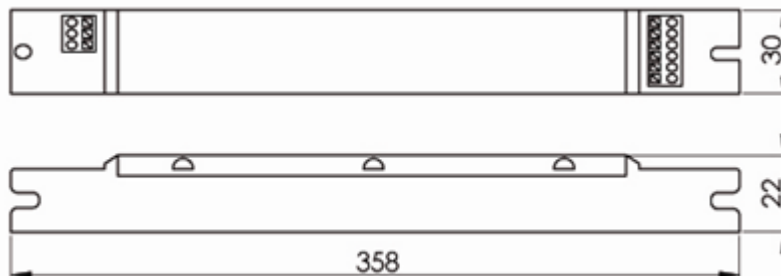

**RoHS**

EN-61347  
EN-61547  
EN-55015  
EN-61000

| Power (W) | Voltage (V) | Frequency (Hz) | Power factor | Current at 230 V (mA) | Temperature Min / Max (°C) | Life span (h) | Crest factor |
|-----------|-------------|----------------|--------------|-----------------------|----------------------------|---------------|--------------|
| 2*35      | 220-240     | 50/60          | 335          | 0,98                  | -10 / +50                  | 30 000        | 1,7          |

#### Technical characteristics:

- ❖ Electronic ballast for rapid starting fluorescent lamp without starter
- ❖ Fuse protection
- ❖ Protection class II
- ❖ Constant luminous flux
- ❖ Total harmonic distortion < 15 %
- ❖ High life span of the lamp
- ❖ Low energy consumption
- ❖ Silent ballast
- ❖ Safety Standards : IEC-61347-2-3; EN-61347-1; EN-61547; EN-61000-3-2 ; EN-61000-3-3 ; EN-55015

#### Wiring diagram:

