


## ELECTRONIC BALLASTS

### EBT5-414

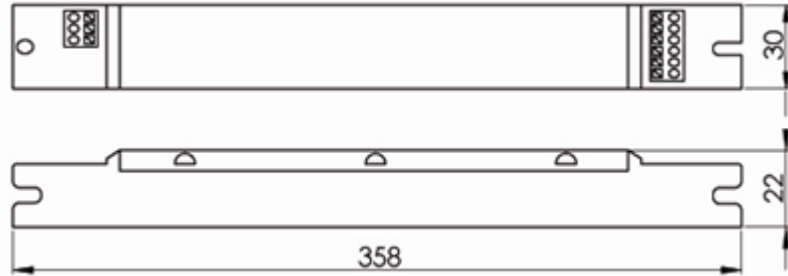

**RoHS**

EN-61347  
EN-61547  
EN-55015  
EN-61000

Power (W)	Voltage (V)	Frequency (Hz)	Power factor	Current at 230 V (mA)	Temperature Min / Max (°C)	Life span (h)	Crest factor
4*14	220-240	270	50/60	0,98	-10 / +50	30 000	1,7

#### Technical characteristics:

- ❖ Electronic ballast for rapid starting fluorescent lamp without starter
- ❖ Fuse protection
- ❖ Protection class II
- ❖ Constant luminous flux
- ❖ Total harmonic distortion < 15 %
- ❖ High life span of the lamp
- ❖ Low energy consumption
- ❖ Silent ballast
- ❖ Safety Standards : IEC-61347-2-3; EN-61347-1; EN-61547; EN-61000-3-2 ; EN-61000-3-3 ; EN-55015

#### Wiring diagram:

