


EQUIPMENTS ON BAKELITE

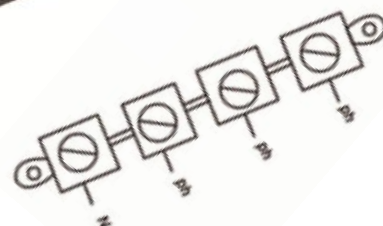

Type	Voltage (V)	Frequency (Hz)	Thermal cable diameter (mm ²)	Dimensions (mm)		
				L	I	H
SHP : 70-150 W HPL : 80-250 W	220-240	50/60	1	300	100	110
SHP : 250-400 W HPL : 400 W	220-240	50/60	1,5	300	100	110

Technical Characteristics:

- ❖ Equipment composed by a ferromagnetic ballast HPS/ IOD (70-400W) or HPL (80-400W), an ignitor KZ400MK or KZ400M, a capacitor, a fuse support and 4 barrel terminals connected on a bakelite support
- ❖ Barrel terminals: 35 mm²
- ❖ An electronic pulse or superposition ignitor is used for equipment HPS/IOD (70-400 W)
- ❖ Thermal wire connexion
- ❖ Easy mounting
- ❖ Screw terminals: domino 1,5 for lamp (HPS : 70-150 W or HPL : 80-250 W)-2,5 mm² for lamp (HPS : 250-400 W or HPL 400 W)
- ❖ Safety Standards : EN-61347-1, EN-61347-2-9 and EN- 60923

NB: On request, possibility to provide a double polyester varnish immersion used for wet or high salinity environments