


MAGNETIC BALLASTS FOR FLUORESCENT LAMPS: FB-26

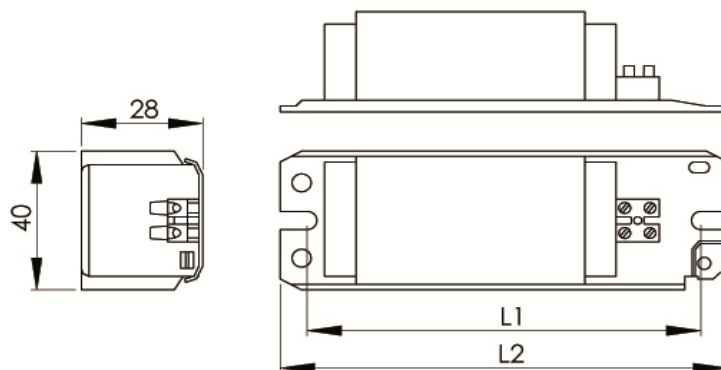

Power (W)	Voltage (V)	Frequency (Hz)	Power factor	weight (kg)	current at 230 V (A)	Dimensions (mm)	
						L1	L2
26	220-240	50	0,5	0,45	0,325	100	110

Technical characteristics:

- ❖ Magnetic ballast for flat or narrow lamps
- ❖ Resin impregnation and heating
- ❖ Protection class I
- ❖ Compensation with capacitor 4 μ F $\pm$ 10%
- ❖ Dielectric stiffness : > 1500 V
- ❖ Screw terminals : 0,75-2,5 mm²
- ❖ Safety Standards : NF EN-61 347 & NF EN- 60 921

Wiring diagram:

