


MAGNETIC BALLASTS

FOR FLUORESCENT LAMPS: FB-36/40

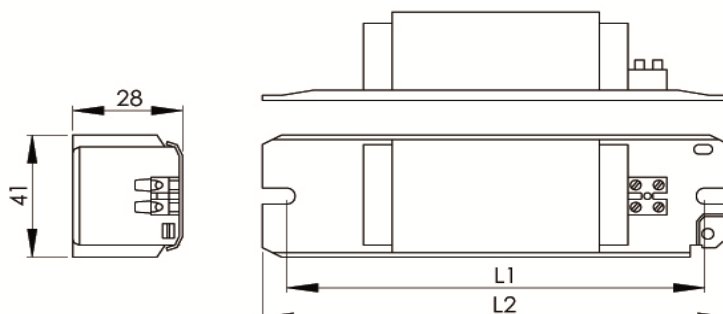

Power (W)	Voltage (V)	Frequency (Hz)	Power factor	weight (kg)	current at 230 V (A)	Dimensions (mm)	
						L1	L2
36/40	220-240	50	0,48	0,52	0,43	140	155

Technical characteristics:

- ❖ Magnetic ballast for flat or narrow lamps
- ❖ Resin impregnation and oven drying
- ❖ Protection class I
- ❖ Compensation with capacitor 4 μF $\pm 10\%$
- ❖ Dielectric stiffness : > 1500 V
- ❖ Safety Standards : NF EN-60620 & NF EN- 60 921

Wiring diagram :

