


MAGNETIC BALLASTS FOR DISCHARGED LAMPS: HPL-125

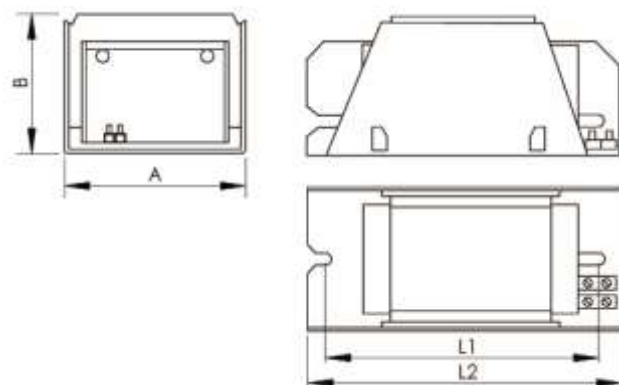

Power (W)	Voltage (V)	Frequency (Hz)	Power factor	Weight (kg)	Current at. 230 V (A)	Dimensions (mm)			
						A	B	L1	L2
125	220-240	50	0,55	1,13	1,15	68	55	72	96

Technical characteristics:

- ❖ Magnetic ballast for SHP/HID lamps 125W
- ❖ Winding class H (200°C)
- ❖ Thermal class (t_w) :130°C
- ❖ Max. increase of temperature above ambient temperature (ΔT) : 70°C
- ❖ Resin impregnation and oven drying
- ❖ Protection class I
- ❖ Compensation with capacitor 12 $\mu F \pm 10\%$
- ❖ Dielectric stiffness: > 2000 V
- ❖ Screw terminals: 0,75-2,5 mm²
- ❖ Safety standards: NF EN-61 347 & NF EN- 60 923

Wiring diagram :

