


ELECTRONIC BALLASTS

EBT8-418



EN-61347
EN-61547
EN-55015
EN-61000

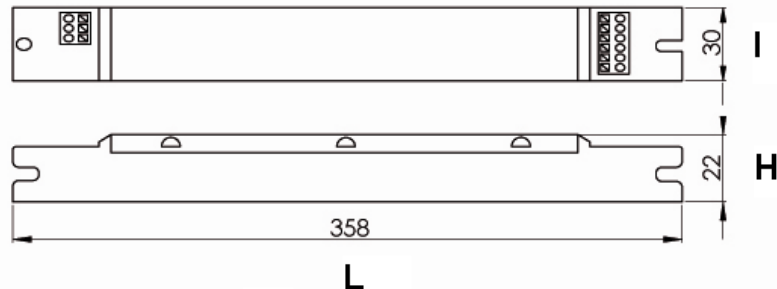

Power (W)	Voltage (V)	Frequency (Hz)	Current at 230 V (mA)	Power factor	Temperature Min / Max (°C)	Life span (h)	Crest factor
4*18	220-240	50/60	320	0,97	-10 / +50	30 000	1,7

Technical characteristics:

- ❖ Electronic ballast for rapid starting fluorescent lamp without starter
- ❖ Fuse protection
- ❖ Protection class II
- ❖ Constant luminous flux
- ❖ Total harmonic distortion < 15 %
- ❖ High life span of the lamp
- ❖ Low energy consumption
- ❖ Silent ballast
- ❖ Safety Standards: IEC-61347-2-3; EN-61347-1; EN-61547; EN-61000-3-2 ; EN-61000-3-3 ; EN-55015

Wiring diagram:

