


MAGNETIC BALLASTS FOR FLUORESCENT LAMPS: FB-58/60

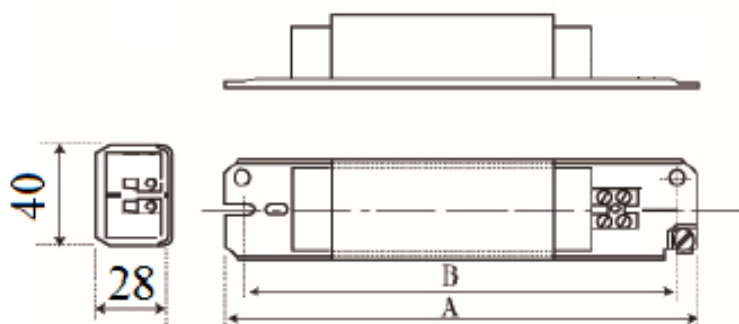

Power (W)	Voltage (V)	Frequency (Hz)	Power factor	weight (kg)	current at 230 V (A)	Dimensions (mm)	
						L1	L2
58/60	220-240	50	0,54	0,84	0,67	112	132

Technical characteristics:

- ❖ Magnetic ballast for flat or narrow lamps
- ❖ Resin impregnation and oven drying
- ❖ Protection group I
- ❖ Compensation with capacitor 7 $\mu\text{F} \pm 10\%$
- ❖ Dielectric stiffness : > 1500 V
- ❖ Screw terminals : 0,75-2,5 mm²
- ❖ Safety Standards : NF EN-60620 & NF EN- 60 921

Wiring diagram:

