


SINGLE PHASE SELF-TRANSFORMERS

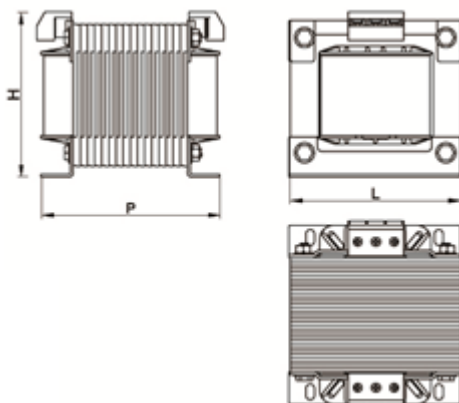

Power (VA)	Weight (kg)	Dimensions (mm)		
		L	P	H
30	1,1	75	77	55
50	1,2	75	77	60
63	1,6	84	60	92
100	2,6	96	75	95
160	3,2	96	85	95
200	4,2	120	95	102
250	4,8	120	95	115
300	5	120	95	115
400	5,8	120	105	115
500	7,9	120	116	125
630	9,5	150	100	150
750	13,5	150	125	163
1000	15,5	150	135	190
1500	17,6	180	135	190
2000	19,8	180	145	190
2500	21,25	180	165	190
3000	22,5	180	165	190

Technical Characteristics:

- ❖ Separated winding transformer
- ❖ Primary/Secondary voltage: 220 V – 230 V – 380 V – 400 V / 110 V or 220 V
- ❖ Other primary/secondary voltages are available under request
- ❖ Varnish immersion group H (180°C) and oven drying
- ❖ Bracket in galvanized tropicalized steel
- ❖ Protection group I/IP00
- ❖ Maximal ambient operating temperature: 45 °C
- ❖ Dielectric rigidity : 3 kV
- ❖ Safety Standards : IEC 61 558-2-4 ; IEC 61 558-2-6 ; IEC 61 558-2-13