


SINGLE PHASE TRANSFORMERS FOR SAFETY AND INSULATION

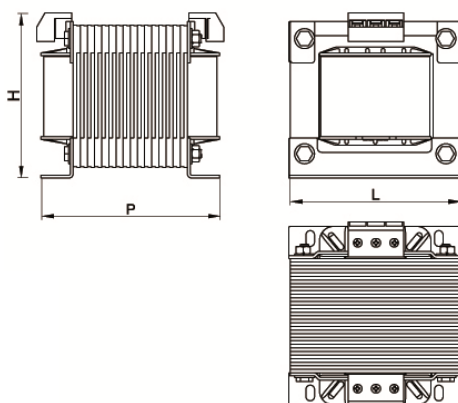

Power (VA)	Input current (A)		Output current (A)			Weight (kg)	Dimensions (mm)		
	220V	380V	12V	24V	110V		L	P	H
30	0,14	0,08	2,5	1,25	0,27	1,05	75	77	55
50	0,23	0,13	4,17	2,08	0,45	1,2	75	77	60
63	0,29	0,17	5,25	2,63	0,57	1,6	84	60	92
100	0,45	0,26	8,33	4,17	0,91	2,1	96	75	95
160	0,73	0,42	13,33	6,67	1,45	3,2	96	85	95
200	0,91	0,53	16,67	8,33	1,82	4,2	120	95	102
250	1,14	0,66	20,83	10,42	2,27	4,6	120	95	115
300	1,36	0,79	25	12,5	2,73	5	120	95	115
400	1,82	1,05	33,33	16,67	3,64	5,8	120	105	115
500	2,27	1,31	41,66	20,83	4,55	7,9	120	116	125
630	2,86	1,66	52,5	26,25	5,73	9,5	150	100	150
750	3,41	1,97	62,5	31,25	6,82	13,5	150	125	163
1000	4,55	2,63	83,33	41,67	9,09	15,5	150	135	190
1200	5,45	3,16	100	50	10,91	15,5	150	135	190
1500	6,82	3,95	125	62,5	13,64	17,6	180	135	190
1750	7,95	4,61	145,83	72,92	15,91	19,8	180	145	190
2000	9,09	5,26	166,66	83,33	18,18	22	180	145	190
2500	11,36	6,58	208,33	104,17	22,73	23,5	180	165	190
3000	13,64	7,89	250	125	27,27	25	180	165	190

Technical Characteristics:

- ❖ Electrical transformers for safety and insulation with separated windings
- ❖ Input/ Output voltage: 220 V-380 V / 1*12 V or 1*24 V or 1*110 V or 2*12 or 2*24 or 2*110 V
- ❖ Varnish immersion group H (180°C) and oven drying
- ❖ Protection class I / IP00
- ❖ Maximal ambient operating temperature: 45 °C
- ❖ Safety Standards : IEC 61558-1 ; IEC 61558-2-6 et : IEC 60269-1*

N.B: (*) On request, It is possible to add a protection fuse for the input and/or the output