


SINGLE PHASE TRANSFORMERS WITH INSULATION COLOMNS

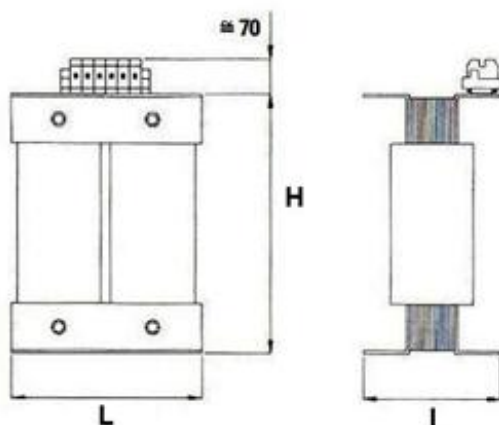

Power (kVA)	Loss (W)	Frequency (Hz)	Weight (kg)	Dimensions (mm)		
				L	P	H
2,5	112	50/60	21	200	144	260
4	153	50/60	28	200	164	260
6,3	235	50/60	39	240	170	310
10	323	50/60	59	280	240	360
16	465	50/60	80	320	215	410
25	716	50/60	118	360	280	460

Technical characteristics:

- ❖ Electric transformer with insulation columns to create an isolated supply against the network
- ❖ Varnish immersion group H and oven drying
- ❖ Insulation / Protection degree: group F / IP00
- ❖ Maximal ambient temperature: 45 °C
- ❖ Other powers are available under request
- ❖ Safety Standards: IEC 61558-1; IEC 61558-2-6 et IEC 61558-2-4 and IEC 61558-2-15*

N.B.: (*) On request, it is possible to add an electrostatic shields between the input and the output