


SINGLE PHASE TRANSFORMERS WITH SEPARATED COILS

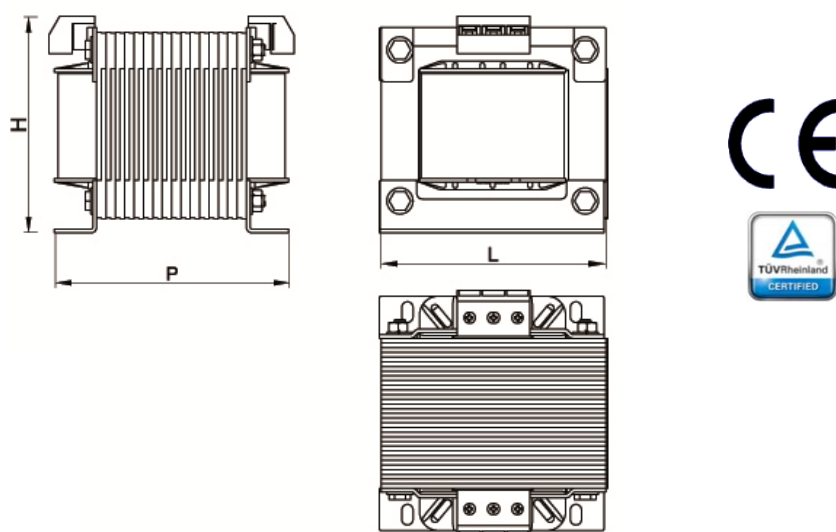

Power (VA)	Input current (A)	Output current (A)	Weight (kg)	Dimensions (mm)		
	230 V	12 V		L	P	H
100	0,43	8,33	2,1	96	75	95
160	0,7	13,33	3,2	96	85	95
200	0,87	16,67	4,2	120	85	102
300	13,04	25	5	120	95	115
400	1,74	33,33	5,8	120	105	115
630	2,74	52,5	9,5	150	100	150
1000	4,35	83,33	15,5	150	135	190

Technical Characteristics:

- ❖ Electric transformer with separated coils for safety or driving
- ❖ Insulation group F
- ❖ Varnish immersion group H (180 °C) and oven drying
- ❖ Galvanized tropicalized steel brocket
- ❖ Protection class I / IP00
- ❖ Maximal ambient temperature: 45 °C
- ❖ Safety Standards : IEC 61558-1, IEC 61558-2-4, IEC 61558-2-6 and IEC 60269-1*

N.B: (*) On request, it is possible to add a fuse for the input and/or output protection