


SUPERIMPOSED-PULSE IGNITORS:KZ1000 ML

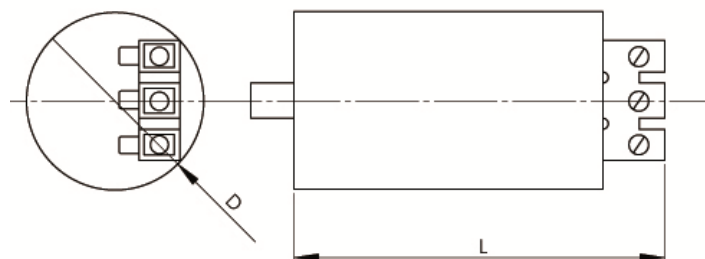

Input voltage (V)	Frequency (Hz)	Ignition voltage (V)	Load voltage (V)	Pulse crest voltage (kV)	Current Max. (A)	Dimensions (mm)	
						D	L
220-240	50/60	≤ 198	196-264	3,5-5	12	45	90

Technical Characteristics:

- ❖ Electronic ignitors for high pressure sodium or metal halide lamps (600-1000 W)
- ❖ Aluminium housing
- ❖ Maximal temperature of ballast : $\leq 90^{\circ} \text{C}$
- ❖ Screw terminals : 0,75-2,5 mm²
- ❖ Safety Standards : EN-61347-2-1; EN-60927 and EN-60662

Wiring diagram:

