


SUPERIMPOSED-PULSE IGNITORS:KZ400 MK

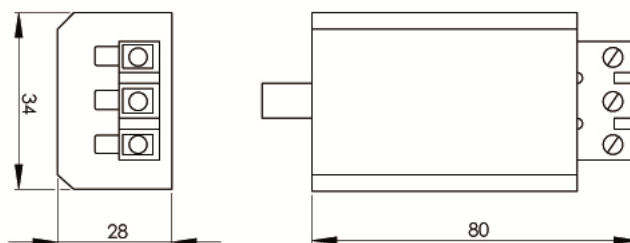

Input voltage (V)	Frequency (Hz)	Pulse voltage (V)	Load voltage (V)	Pulse crest voltage (kV)	Current Max. (A)
220-240	50/60	≤ 198	196-264	2,8-5	5

Technical Characteristics:

- ❖ Electronic ignitors for high pressure sodium or metal halide lamps (70-400 W)
- ❖ Polyamide filled with 30% fiberglass housing
- ❖ Maximal temperature of ballast : $\leq 85^{\circ} \text{C}$
- ❖ Safety Standards: EN-61347-2-1; EN-60927 and EN-60662

Wiring diagram:

