

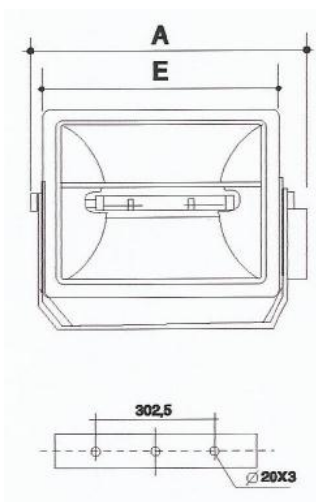


STRICK ST024

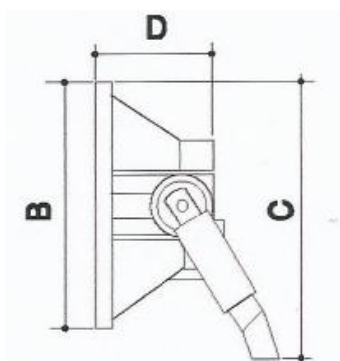

EN 60598

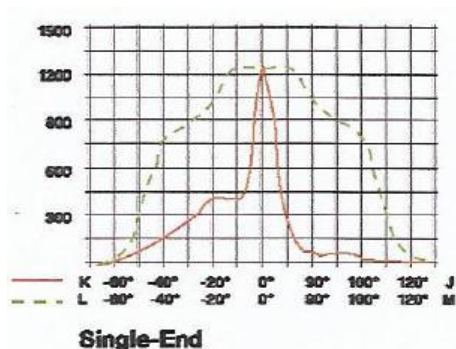

Lamp	Power (W)	Frequency (Hz)	Input voltage (V)	Lamp holder	Dimensions (mm)				
					A	B	C	D	E
HID	1000-2000	50	220-240	E40	740	480	595	235	600
HPS	1000	50	220-240	E40					

Technical characteristics:

- ❖ Symmetric floodlights class I or II for lamp HPS or HID
- ❖ Protection degree: IP65
- ❖ Mechanical stress protection degree: IK08
- ❖ Heat-shocks resistance tempered glass
- ❖ Stainless steel screws and nuts
- ❖ Pure anodized and brilliant aluminum reflector
- ❖ Heat resistance silicone gasket
- ❖ Separated type protection connecting plate with ignitor integrating fire protection wires