



STRICK ST034

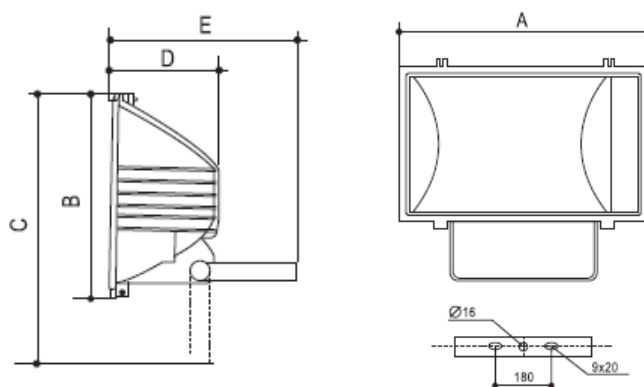

EN 60598

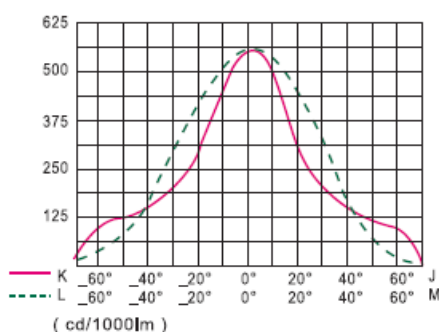

Power (W)	Frequency (Hz)	Input voltage (V)	Lamp holder	Dimensions (mm)				
				A	B	C	D	E
1000	50	220-240	E40	588	415	540	195	295

Technical characteristics:

- ❖ Symmetric floodlights class I or II for lamp HPS or IOD
- ❖ Protection degree: IP65
- ❖ Mechanical stress protection degree: IK08
- ❖ Aluminum housing injected and treated against corrosion
- ❖ Shocks - heat resistance tempered glass
- ❖ Stainless steel screws and nuts
- ❖ Pure anodized and brilliant aluminum reflector
- ❖ Heat resistance silicone gasket
- ❖ Housing and Gear Box paint in metalized grey by thermo-lacked polyester powder
- ❖ Stuffing box for passing the cable