

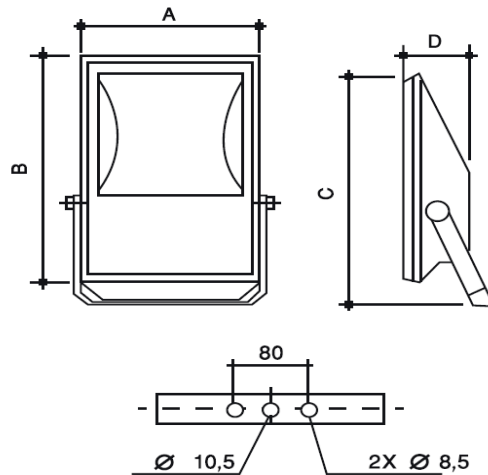


STRICK ST150

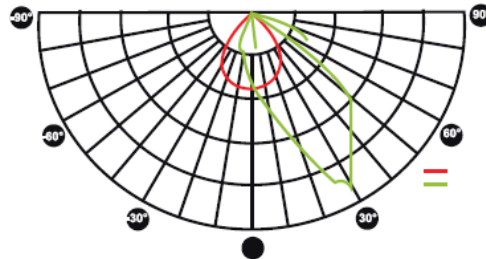

EN 60598



Lamp	Power (W)	Frequency (Hz)	Input voltage (V)	Lamp holder	Dimensions (mm)			
					A	B	C	D
HID	70-150	50	220-240	RX7s	238	346	400	88

Technical characteristics:

- ❖ Asymmetric floodlights class I or II for lamp HID
- ❖ Protection degree: IP65
- ❖ Protection degree against mechanical shocks: IK08
- ❖ Aluminum housing injected and treated against corrosion
- ❖ Shocks- heat resistance tempered glass fixed to housing by 2 hinges and 2 clips in polycarbonate
- ❖ Pure anodized and brilliant aluminum reflector
- ❖ Heat resistance silicone gasket
- ❖ Possibility to change the luminous source or the power according to customer need
- ❖ Fixed to the support by 2 screws and external nuts M10
- ❖ Stuffing box for cable passing Ø 8 to 12 mm