

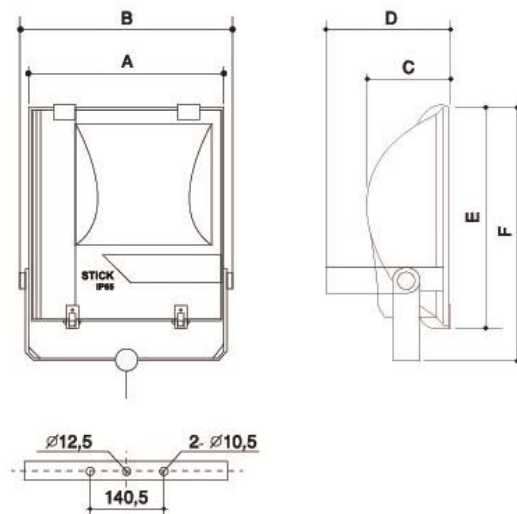


STRICK ST202



EN 60598



Power (W)	Lamp holder	Input voltage (V)	Frequency (Hz)	Dimensions (mm)					
				A	B	C	D	E	F
400	E40	220- 240V	50	416	445	148	255	460	540

Technical characteristics:

- ❖ Asymmetric floodlights class I or II for lamp HPS or HID
- ❖ Protection degree: IP65
- ❖ Mechanical stress protection degree : IK08
- ❖ Aluminum housing injected and treated against corrosion
- ❖ Shocks and heat resistance tempered glass
- ❖ Stainless steel external screws and nuts
- ❖ Pure anodized and brilliant aluminum reflector
- ❖ Heat resistance silicone gasket
- ❖ Steel bracket