

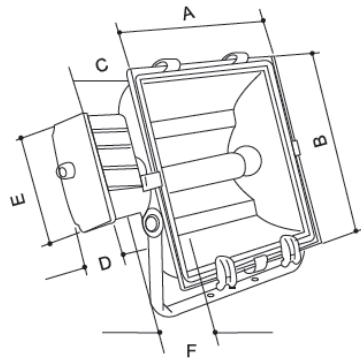


STRICK ST212

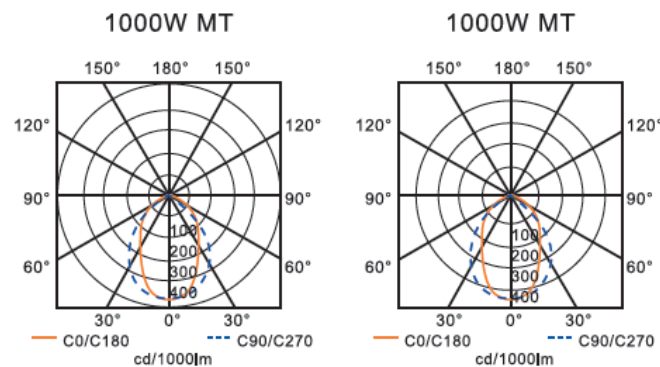

EN 60598



Puissance (W)	Frequency (Hz)	Input voltage (V)	Lamp holder	Dimensions (mm)					
				A	B	C	D	E	F
1000	50	220-240	E40	450	470	125	84	132	165

Technical characteristics:

- ❖ Symetric floodlight class I or II for lamps HPS or HID
- ❖ Protection degree: IP65
- ❖ Mechanical stress protection degree: IK08
- ❖ Aluminum housing injected and treated against corrosion
- ❖ Shocks-heat resistance tempered glass fixed to the housing with 2 hinges et 4 clips in polycarbonate
- ❖ Stainless steel external screws and nuts
- ❖ Pure anodized and brilliant aluminum reflector
- ❖ Heat resistance silicone gasket