



STRICK ST350

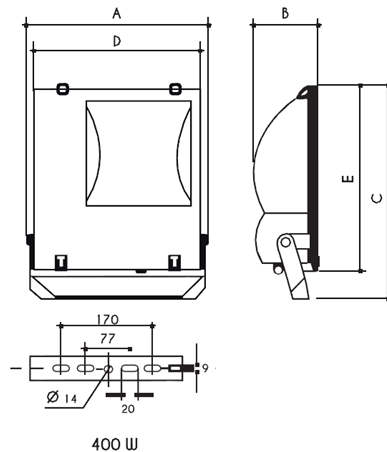

EN 60598

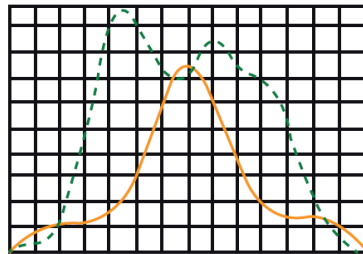

Power (W)	Frequency (Hz)	Input voltage (V)	Lamp holder	Dimensions (mm)				
				A	B	C	D	E
250-400	50	220-240	E40	455	145	495	424	435

Technical characteristics:

- ❖ Symmetric floodlights class I or II for lamp HPS or IOD
- ❖ Protection degree: IP65
- ❖ Mechanical stress protection degree: IK08
- ❖ Aluminum housing injected and treated against corrosion
- ❖ Shocks and heat resistance tempered glass fixed to the housing by 2 hinges and 2 clips in polycarbonate
- ❖ Stainless steel external screws and nuts
- ❖ Pure anodized and brilliant aluminum reflector
- ❖ Heat resistance silicone gasket
- ❖ Pure anodized and brilliant aluminum reflector
- ❖ Waterproof connection box with gland, on request
- ❖ Fixed to the support by 2 screws and external nuts M10
- ❖ Stuffing box for Ø 8 à 12 mm cable crossing