





STRICK ST406

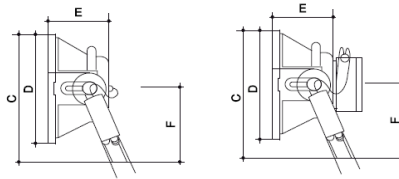

EN 60598



Distribution Extensive

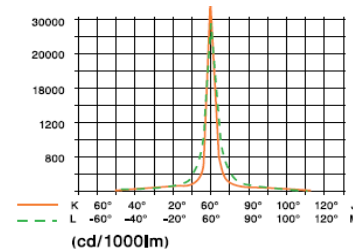

Distribution intensive

Power (W)	Frequency (Hz)	Input voltage (V)	Lamp holder	Dimensions (mm)					
				A	B	C	D	E	F
1000	50	220-240	K12s	531	470	500	451	250	300
1800	50	220-240	K12s						
2000	50	380	K12s						

Technical characteristics:

- ❖ Symmetric floodlights class I or II for lamp HID
- ❖ Protection degree: IP65
- ❖ Mechanical stress protection degree: IK08
- ❖ Housing and Gear Box in aluminum injected and treated against corrosion
- ❖ Steel support
- ❖ Shocks and heat resistance tempered glass against
- ❖ Pure anodized and brilliant aluminum reflector
- ❖ Heat resistance silicone sealing
- ❖ Waterproof connection box with gland
- ❖ Stuffing box for Ø 8-12 mm cable passing