


## HALOGEN TRANSFORMERS:

### TLA-1250

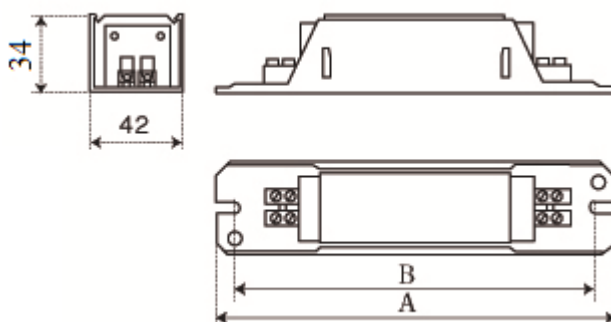

| Power<br>(VA) | Frequency<br>(Hz) | Input<br>voltage<br>(V) | Output<br>voltage (V) | Input<br>current at<br>230 V<br>(A) | Output<br>current at<br>230 V<br>(A) | Weight<br>(kg) | Dimensions<br>(mm) |     |
|---------------|-------------------|-------------------------|-----------------------|-------------------------------------|--------------------------------------|----------------|--------------------|-----|
|               |                   |                         |                       |                                     |                                      |                | A                  | B   |
| 50            | 50/60             | 230                     | 11,5                  | 0,27                                | 4,16                                 | 0,78           | 192                | 167 |

### Technical Characteristics:

- ❖ Transformers with separated winding for low voltage halogen lamps 12 V
- ❖ Polyester varnish immersion and oven drying
- ❖ Ambient operating temperature : < 50°C
- ❖ Protection class I
- ❖ Dielectric rigidity : > 2000 V
- ❖ Predict an external slow melting fuse of 0,25 A
- ❖ Safety Standards : NF EN 61 558-2-6 ; NF EN 61 558 -2-4

### Wiring diagram:

